




RIVETNUT TECHNOLOGY SYSTEMS LIMITED

TECHNICAL DATA SHEET

RFOS-CD IN MILD STEEL

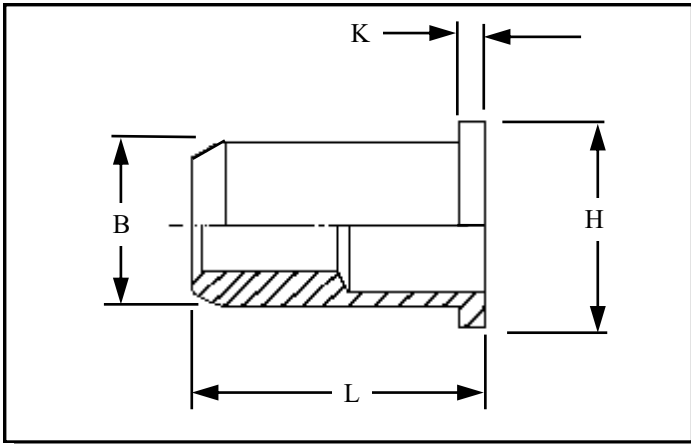

Round flat head open ended Rivetnuts for material up to 8.00 mm thick

All dimensions in mm
Material :- Mild Steel
Finish :- Zinc Cr3

R.T.S. SALES LINE
01296 330331

THREAD SIZE	GRIP RANGE	HOLE SIZE -0.0 +0.10	BODY DIA "B"	HEAD DIA "H" ± 0.10	LENGTH "L"	"K"	PART NUMBER
M3	0.50 to 2.00	5.10	5.00	8.00	10.50	0.75	RFOS-03020-CD
	2.00 to 3.00				11.50		RFOS-03030-CD
M4	0.50 to 3.00	6.10	6.00	10.00	11.50	0.75	RFOS-04030-CD
	3.00 to 4.50				13.00		RFOS-04045-CD
M5	0.50 to 3.00	7.10	7.00	11.00	13.00	1.00	RFOS-05030-CD
	3.00 to 5.50				16.00		RFOS-05055-CD
M6	0.50 to 3.00	9.10	9.00	13.00	16.00	1.50	RFOS-06030-CD
	3.00 to 5.50				18.00		RFOS-06055-CD
	5.50 to 8.00				20.50		RFOS-06080-CD
M8	0.50 to 3.00	11.10	11.00	16.00	17.50	1.50	RFOS-08030-CD
	3.00 to 5.50				20.00		RFOS-08055-CD
	5.50 to 8.00				23.00		RFOS-08080-CD
M10	0.80 to 3.50	12.50	12.40	18.50	22.00	2.25	RFOS-10035-CD124
	3.50 to 6.00				25.00		RFOS-10060-CD124
M10	0.80 to 3.50	13.10	13.00	19.00	23.00	2.00	RFOS-10035-CD
	3.50 to 6.00				26.00		RFOS-10060-CD
M12	1.00 to 4.00	16.10	16.00	23.00	27.00	2.00	RFOS-12040-CD
	4.00 to 7.00				30.00		RFOS-12070-CD

For additional information and technical support please contact R.T.S. technical sales department . R.T.S. reserve the right to change specifications at any time . Information given is for guidance only and should not be used for specific design criteria without reference to our application engineers.