




RIVETNUT TECHNOLOGY SYSTEMS LIMITED

RFOS-J IN MILD STEEL

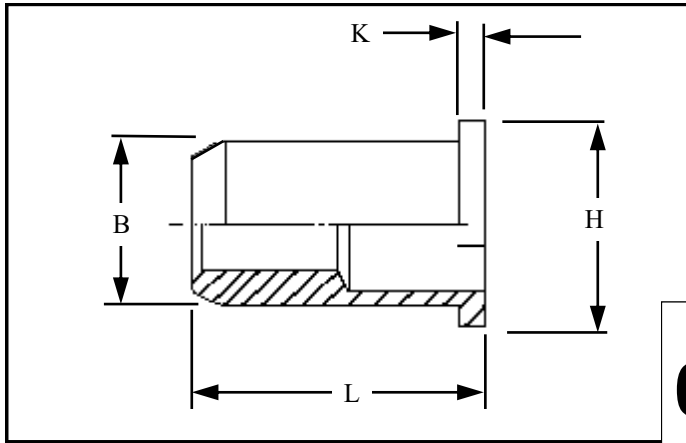

Round flat head open ended
Rivetnuts for material up to
12.00 mm thick

All dimensions in mm
Material :- Mild Steel
Finish :- Zinc Cr3
RoHS compliant

R.T.S. SALES LINE
01296 330331

TECHNICAL DATA SHEET

THREAD SIZE	GRIP RANGE	HOLE SIZE -0.0 +0.10	BODY DIA "B"	HEAD DIA "H" ± 0.10	LENGTH "L"	"K"	PART NUMBER	
M3	0.30 to 1.80	5.10	5.00	8.00	9.50	0.70	RFOS-03018-J	
M4	0.50 to 2.00	6.10	6.00	9.00	11.20	0.80	RFOS-04020-J	
M5	0.50 to 2.50	7.10	7.00	10.00	12.80	1.00	RFOS-05025-J	
	0.50 to 2.50			11.00	13.00		RFOS-05025-JLF	
M6	0.80 to 3.00	9.10	9.00	13.00	16.00	1.50	RFOS-06030-J	
	3.00 to 5.00			18.50	RFOS-06050-J			
M8	0.90 to 3.00	11.10	11.00	15.00	18.00	1.50	RFOS-08030-J	
	3.00 to 5.50			16.00	21.00		RFOS-08055-J	
	5.50 to 8.00			16.00	23.00		RFOS-08080-J	
M10	1.00 to 4.00	13.10	13.00	17.00	20.00	1.50	RFOS-10040-J	
	1.00 to 5.00			19.00	24.00		2.00	RFOS-10050-J
	4.50 to 6.00			19.00	25.50		2.00	RFOS-10060-J
	6.00 to 9.00 9.00 to 12.00			19.00 19.00	29.30 32.10		2.00 2.00	RFOS-10090 RFOS-10120
M12	7.00 to 10.00	16.10	16.00	23.00	32.00	2.00	RFOS-12100-J	
M16	1.00 to 5.80	21.10	21.00	26.00	32.80	2.50	RFOS-16058-J	

For additional information and technical support please contact R.T.S. technical sales department . R.T.S. reserve the right to change specifications at any time . Information given is for guidance only and should not be used for specific design criteria without reference to our application engineers.